

# SELECT®

## Residential Electric Water Heaters



**Tall, Short and Lowboy models available.**

**Diffuser Dip Tube** - Helps reduce lime and sediment buildup, maximizes hot water output. Made of State PEXAN™, a cross-link PEX polymer that can withstand long-term exposure to water temperatures up to 400°F.

**Aluminum Anode Rod** - Helps protect against corrosion for longer life.

**Durable Tamper-Resistant Brass Drain Valve**

**Glass-Lined Tank** - For long-lasting protection against rust and corrosion.

**Upgrade Tank Warranty to 10 Years** - See details on page 2.

**Certified and Rated Side-Mount T&P Relief Valve** - Top-mounted T&P Relief Valve available as option on some models.

**6-Year Limited Tank and Parts Warranty**

**Code Compliance** - Meets or Exceeds the Federal Minimum Energy Standards according to the latest edition of the National Appliance Energy Conservation Act (NAECA). Also complies with ASHRAE 90.1-2004 and Current Editions of ICC Codes and HUD Standards.



For more information on Select® contact:  
State Water Heaters  
500 Tennessee Waltz Parkway, Ashland City, TN 37015  
**800-365-0024 Toll-free USA**  
**[www.statewaterheaters.com](http://www.statewaterheaters.com)**

SRESS00706

October 2008R

**SOLID.STATE.**



©2008 State Industries

## SELECT® Residential Electric Water Heaters



MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GALLON CAPACITY	ELEMENT WATTAGE 240 VAC		RECOVERY 90°F RISE	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS)
				STANDARD	MAXIMUM			A HEIGHT	B DIAMETER	C	
TALL MODELS											
ES6 30 DORT	43	.93	30	4500	6000	21	16	46-1/2	18	39-1/2	95
ES6 40 DORT	52	.92	40	4500	6000	21	16	59-1/2	18	53-1/2	115
ES6 52 DORT	60	.91	50	4500	6000	21	16	54	20-1/2	47-1/2	125
ES6 55 DORT	67	.90	55	4500	6000	21	16	60-1/4	20-1/2	52-3/4	135
ES6 66 DORT	72	.88	66	4500	6000	21	16	60-1/4	22	53	170
ES6 80 DORT	81	.86	80	4500	6000	21	16	60-1/2	24	52	200
ES6 120 DORT *	112	.81	119	4500	6000	21	16	64-1/4	28	54-1/4	320
SHORT MODELS											
ES6 30 DORS	43	.93	30	4500	6000	21	16	36-1/2	20-1/2	28	100
ES6 40 DORS	52	.92	40	4500	6000	21	16	44	20-1/2	37-3/4	115
ES6 50 DORS	62	.90	50	4500	6000	21	16	48	22	40-1/2	150
LOWBOY MODEL											
ES6 30 DOLS	41	.93	29	4500	6000	21	16	30	22	22-1/2	105
ES6 40 DOLNS	48	.92	38	4500	6000	21	12	31-1/4	23	24-5/8	120
ES6 50 DOLS	55	.91	50	4500	6000	21	16	34	26-1/2	25	170


Recoveries are rounded to nearest gallon

Water Connections - 3/4" on all models

For 10-Year Tank Warranty, change "6" to "X" in Model Number (ESX 40 DORT)

\*This model is not available with top-mounted T&P Valve

10-Year Tank Warranty and top T&P Valve option combo not available on ES6 40 DOLNS and ES6 50 DOLS

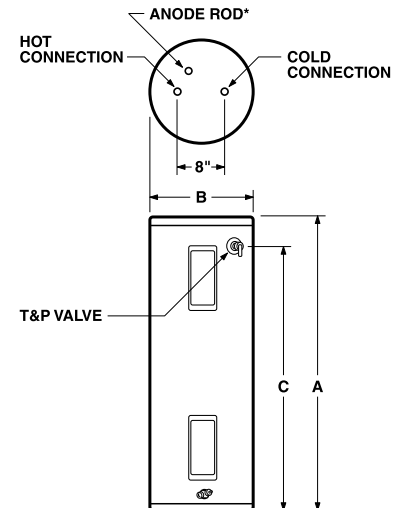

\*Location for optional top-mounted T&P Valve, if available and ordered from factory.

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on Select® contact:  
State Water Heaters  
500 Tennessee Waltz Parkway, Ashland City, TN 37015  
**800-365-0024 Toll-free USA**  
[www.statewaterheaters.com](http://www.statewaterheaters.com)

**SOLID.STATE.**

